

Cilindro a gas ajustable en altura, que no permite el giro
Height adjustable gas spring that does not allow the turning




CODIGO CODE	AA	R	F1	F	GK	E	D	C	I	B	L
DA001-AD7000	198	95	400N	171	70	101	141	211	6	236	306
DA004-AD7008	213	110	400N	181	70	111	156	226	11	266	336
DA008-AD7002	233	120	400N	201	70	131	176	246	11	296	366
DA015-AD7122	243	140	320N	211	70	141	186	256	11	326	396
DA017-AD7032	264	140	320N	231	70	161	207	277	12	347	417
DA025-AD7032	264	155	320N	231	70	161	207	277	12	362	432
DA050-AD7072	287	175	320N	246	70	176	230	300	20	405	475
DA049-AD7058	295	155	320N	256	70	186	238	308	18	393	463
DA065-AD7076	355	200	400N	305	70	235	298	368	29	498	568
DA060-AD7062	410	260	400N	375	70	305	363	433	24	623	693
DA083-AD7088	500	200	400N	455	70	385	453	523	34	653	723
DA0881J-AD5510	531	323	150N	510	63	447	492	555	11	815	878
DA0882J-AD5510	531	393	150N	510	63	447	492	555	11	885	948

Disponible en varias fuerzas / Several strengths available

Se puede limitar el giro a 180°, 90°...
incluso eliminar el giro completamente
The turning can be limited to 180°, 90°...
Even to avoid the turning completely



Tubo exterior disponible en Ø50
Outer tube available in Ø50

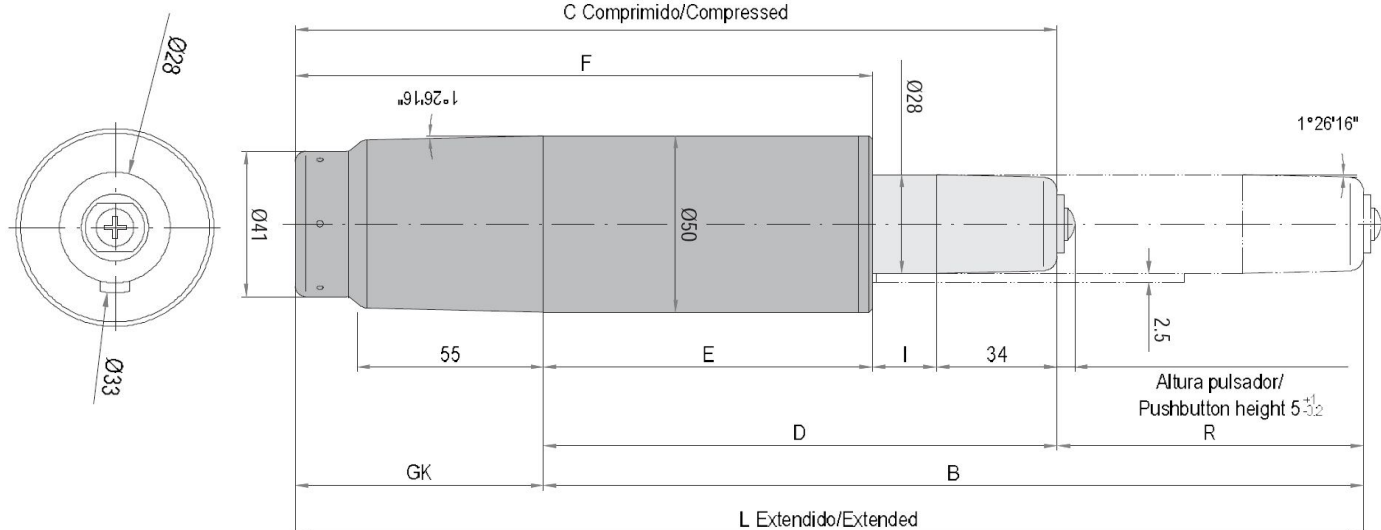

DA-01-ESEN2019